



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04M 3/22, H04L 12/64, 12/66, H04M 7/00, 3/00		A1	(11) International Publication Number: WO 98/44703
			(43) International Publication Date: 8 October 1998 (08.10.98)
(21) International Application Number: PCT/SE98/00509		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 20 March 1998 (20.03.98)		<p>Published With international search report.</p>	
(30) Priority Data: 08/828,546 31 March 1997 (31.03.97) US			
(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).			
(72) Inventor: ANDREASON, Tomas; Tyresövägen 2, S-135 40 Tyresö (SE).			
(74) Agent: ERICSSON TELECOM AB; IPR Management & Patent Dept., S-126 25 Stockholm (SE).			

(54) Title: INTERCONNECTION OF TELEPHONE EXCHANGES VIA A COMPUTER NETWORK

(57) Abstract

The present invention refers to a telephone exchange, a telephone system and a method for setting up telephone connections to at least one other exchange via a computer network. The exchange (10) comprises a switch control (42) means and a network connection device (44) for communication with one other network connection device in another exchange (12). The network connection device in the exchange and the other network connection device set up a bi-directional data packet connection for signalling between each other via the computer network (14). It applies a signal structure suitable for telephony over the computer network to received speech signals for producing data packets containing telephony and send these packets to the other network connection device over the signalling channel or a traffic channel set up over the computer network using signalling over the signalling channel. The switch control means surveys and services the network connection device.

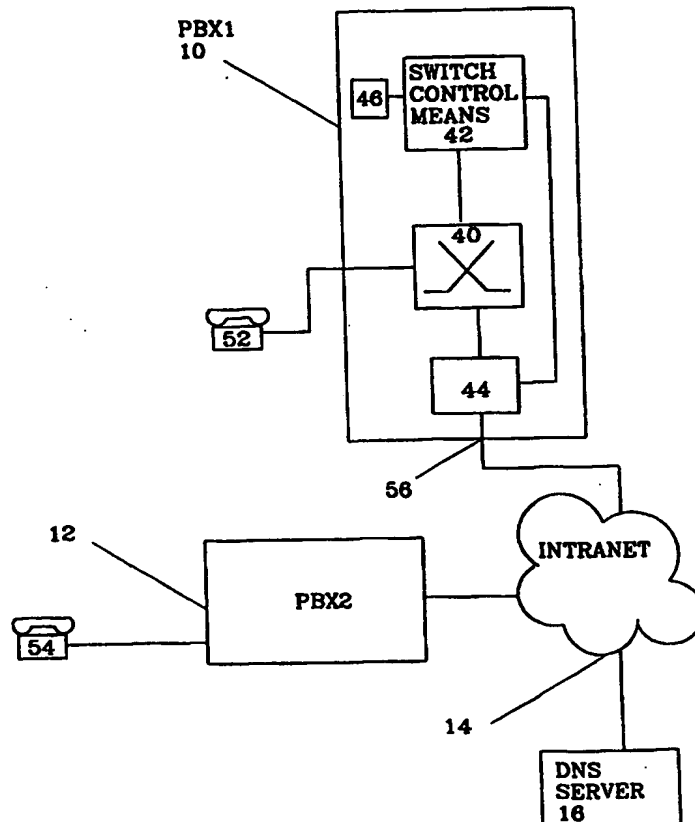

BEST AVAILABLE COPY

BEST AVAILABLE COPY

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

INTERCONNECTION OF TELEPHONE EXCHANGES VIA A COMPUTER NETWORK**TECHNICAL FIELD**

The present invention relates to the interconnection of telephone exchanges with the use of a computer network and more particularly to the connection of telephone calls between exchanges via a computer network.

STATE OF THE ART

Computer networks in the form of internet and intranets are in widespread use and the possibility of transmitting voice over computer networks such as the internet has become more and more popular because of the low price on using the internet. Many companies also have intranets for communication between computers in the company. Many of these companies also have two or more telephone exchanges interconnected by leased lines or the public switched telecommunications network.

W096/20553 is mainly concerned with a system of transmitting voice mail and electronic mail messages in a computer network. In one part of the document there is however described how the internet can be used to set up a telephone link between two subscribers. The link goes from one subscriber to a first internet service provider via a first local public switched telephone network, then continues to a second internet service provider via the internet, from which second internet service provider the link continues to the second subscriber via a second public switched telephone network. Access to the internet is here always provided by an internet service provider.

In a Brochure "An introduction to distributed multimedia networks", by Harvey Kaufman, Netspeak Corporation, a

telecommunication system is shown including telephone exchanges in the form of private branch exchanges (PBX) which are interconnected both by a public switched telephone network (PSTN) and by computer networks. The private branch exchanges are here connected to the computer networks through external gateways (WGX). The description is very short and it is not clear how speech connections between exchanges are set up via the computer network. In order to set up a speech connection a PBX would first have to use trunk signalling with a first gateway in order to set up a connection to it, the first gateway would then communicate with a second gateway over the computer network and the second gateway would set up a telephone connection with a receiving PBX. This would constitute an inflexible system and a lot of double work for operation and maintenance of both gateways and exchanges. The exchanges also have difficulties in monitoring the quality of the traffic over the computer network and react on such information.

The telecommunications standard ITU-T H.323 describes different protocols for conversion of speech to data packets in a gateway and vice versa.

The Swedish Patent application No. SE 9602918-6, filed 2 August 1996, which is identical to US provisional application "Method and Arrangement for Connection Between a Computer Network and a Telecommunication Network", filed August 12, 1996, describes how two private branch exchanges can use the internet for setting up compressed voice calls between them, each using a modem connected to the backplane or switch core of the PBX.

SUMMARY OF THE INVENTION

The present invention concerns a problem of how to reduce the cost of interconnecting two or more telephone exchanges by using a data communication network while at the same time obtaining
5 efficient surveillance and service of the channels set up between the exchanges over the computer network and of the network addresses used.

This problem is solved by including, in at least one exchange to be connected, at least one network connection device for
10 communication with other network connection devices in the other exchanges or with gateways connected to the other exchanges, where a network connection device sets up a bi-directional data packet connection as a signalling channel to another exchange via a gateway or another network connection device, and the
15 switch control means of the exchanges perform signalling over this channel. At least one network connection device in an exchange applies a signal structure suitable for telephony over the computer network to received speech signals for producing data packets containing telephony and sends the data packets
20 containing telephony to the other network connection device over the signalling channel or over a traffic channel set up between the exchanges over the computer network using signalling over the signalling channel. The switch control means in an exchange also comprises monitoring means arranged to survey and service
25 the network connection device in the same exchange.

The object of the invention is thus to obtain a telephone exchange, a telephone system comprising such an exchange and a method of transmitting signals that reduces the cost of interconnecting two or more telephone exchanges by using a data

communication network while at the same time enabling efficient surveillance and service of the channels set up between the exchanges over the computer network and the network addresses used.

- 5 This is achieved by a telephone exchange and a telephone system including such an exchange, where the exchange comprises a switch core, a switch control means responsible for setting up connections between users of the exchange and at least one network connection device connected between the switch core and
10 a gate of the exchange for communication with at least one other exchange via a gateway or via at least one other network connection device.

- At least one of the network connection devices in the exchange sets up, together with the gateway or the other network
15 connection device, a bi-directional data packet connection as a signalling channel between the switch control means of the exchange and a switch control means of the other exchange via the computer network,
sends signalling information over this signalling channel,
20 applies a signal structure suitable for telephony over the computer network to speech signals received from the switch core in order to produce data packets containing telephony, and
sends the data packets containing telephony to the other network connection device over the signalling channel or over a traffic
25 channel that has been set up between the exchanges via the computer network using signalling over the signalling channel.
The switch control means also comprises monitoring means that surveys and services the network connection device.

This is also achieved by a method comprising the steps of:

setting up a bi-directional data packet connection as a signalling channel between the exchanges via the computer network,

5 performing signalling between the exchanges over the signalling channel,

applying a signal structure suitable for telephony over the computer network to telephone signals to be sent from the first exchange to the second exchange,

10 packing the telephone signals having said structure in packets, sending said packets from the first exchange to the second exchange over the signalling channel or over a traffic channel that has been set up between the two exchanges via the computer network in dependence of signalling performed over the
15 signalling channel, and

surveying and servicing, in at least one of the exchanges, channels between the exchanges.

The object is also achieved by a telephone exchange and a telephone system comprising a switch core, a switch control
20 means responsible for setting up connections between users of the exchange and at least one network connection device connected between the switch core and a gate of the exchange for communication with at least one other exchange via a gateway or via at least one other network connection device.

25 At least one of the network connection devices in the exchange sets up, together with the gateway or the other network connection device, a bi-directional data packet connection as a signalling channel between the switch control means of the exchange and a switch control means of the other exchange via
30 the computer network,

sends signalling information over this signalling channel,
receives, over the signalling channel or over a traffic channel
set up between the exchanges via the computer network using
signalling over the signalling channel, data packets containing
5 telephony from the other network connection device,
removes a signal structure suitable for telephony from the
content of said data packets for obtaining speech signals, and
sends the speech signals to the switch core for transmittal to a
user connected to the exchange.

10 The switch control means also comprises monitoring means
arranged to survey and service the network connection device.

The object is also achieved by a method comprising the steps of:
setting up a bi-directional data packet connection as a
signalling channel between the exchanges via the computer
15 network,
performing signalling between the exchanges over the signalling
channel,
receiving, in the second exchange, data packets sent from the
first exchange over the signalling channel or over a traffic
20 channel that has been set up between the two exchanges via the
computer network in dependence of signalling performed over the
signalling channel,
removing a signal structure suitable for telephony over the
computer network from the received packets in order to obtain
25 speech signals,
sending the speech signals to a user connected to the second
exchange, and
surveying and servicing, in at least one of the exchanges,
channels set up over the computer network.

The present invention has several advantages. It reduces the cost for setting up telephone connections by using an existing computer network for telephony. The exchange according to the invention can monitor, survey and service channels set up over
5 the computer network. In this way all monitoring functions used for channels in a normal telephone network can be used for channels over the computer network.

A very flexible way of interconnecting exchanges can be obtained, that can easily be reorganised by way of adding and
10 removing exchanges to communicate with and by increasing and reducing the number of channels between exchanges by only modifying the setting of computer network addresses and port numbers to be used in an exchange.

A traffic channel or the signalling channel when used as a
15 traffic channel are not channels in the ordinary sense. They preferably use UDP (unreliable datagram protocol). The channels then are connection-less type of connections. These channels do thus not have any relation to channels in time slots and channels of that type. The switch control means does however
20 treat them as these ordinary traffic channels.

The invention will now be described in more detail with reference to preferred embodiments and to the enclosed drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 shows a block schematic of a telephone system according
25 to the invention comprising two telecommunication exchanges connected to each other via a computer network,
fig. 2 shows a block schematic of a computer network connection device in an exchange,

fig. 3 shows a flow chart of a method for setting up channels to be used for signalling and telephone signals between exchanges in the telephone system,

fig. 4 shows a flow chart of a method used by an exchange for
5 sending telephone signals over the computer network, and

fig. 5 shows a flow chart of a method used by an exchange for receiving telephone signals over the computer network.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

10 In fig. 1 is shown a telephone system according to the invention comprising two telephone exchanges 10 and 12, for example in the form of private branch exchanges, which are interconnected by a computer network 14, which network in this embodiment is an intranet. It shall be understood that the system can include more telephone exchanges, each connected to the intranet. The
15 computer network is also not limited to an intranet but also internet is possible as well as various types of local networks or combinations of intranet and internet so that exchanges connected to the internet can get connected to the intranet of a company. The system is also not limited to private branch
20 exchanges.

A first of the exchanges 10 PBX1 comprises a switch control means 42 connected to a switch core 40 and to a network connection device 44, where the network connection device 44 is connected between the switch core 40 and a gate 56 for
25 connection to the computer network 14. The switch core 40 is connected to a first extension 52 (shown outside the exchange). The switch control means 42 comprises a monitoring means 46 arranged for surveying and servicing the network connection device. A second of the exchanges PBX2 12, which is identical in
30 structure to the first exchange and is therefore shown as an

empty box, is also connected to the computer network and has a second extension 54 connected to itself. The extensions could also be replaced by subscribers in a public switched telephone network (PSTN) who get connected to a private branch exchange via said PSTN. What happens with the two private branch exchanges in the preferred embodiment is that they set up traffic channels either in the form of channels on a per call basis or in the form of simulation of a trunk line between each other via the intranet 14. This can be very advantageous especially for big companies that have a number of different private branch exchanges at different locations and at the same time have an intranet interconnecting computers within the company at the same locations. With the present invention telephone calls can be set up between private branch exchanges in a company using an already existing intranet, which leads to the saving of leased lines and perhaps of savings in avoiding the use of the public switched telephone network (PSTN). A DNS (Domain Name System) server 16 is also connected to the intranet 14.

The first exchange 10 can comprise several network connection devices 44. Each device could be dedicated to communication with a separate exchange or could be dedicated to communication with several exchanges. More than one network connection device could also be dedicated to communication with one exchange. The main part of the description and the figures will however only be limited to one network connection device for simplicity. The number of network connection devices in the exchange and the number dedicated to each other exchange could be determined by expected traffic between the exchanges.

In fig. 2 is shown a network connection device 44 according to the invention. The network connection device 44 comprises a signal shaping means 22 connected to the switch core of the exchange, a signal processing means 24 connected between the
5 signal shaping means and the gate and a local control means 20 connected to the switch control means as well as to the signal shaping means 22 and the signal processing means 24. A signalling channel store 18 and a traffic channel store 19 are connected to the local control means 20. The network connection
10 device 44 is preferably realised in the form of a processor having various memories and registers connected to it.

Fig. 3 shows a method for initially setting up channels between exchanges of the telephone system in order to simulate a trunk over the computer network.

15 Fig. 4 shows a flow chart of the method according to which an exchange sending packets is working and fig. 5 shows a flow chart of the method according to which an exchange receiving packets is working.

The functioning of the system according to the invention will
20 now be described with reference to fig. 1, 2, 3, 4 and 5.

The initial setting up of channels according to an embodiment of the invention will now be described with reference to fig. 1, 2 and 3. Before starting up the system according to the invention for the first time, the local control means 20 of the network
25 connection device 44 in the first exchange PBX1 has a port number stored in the signalling channel store 18, which port number is a signalling port number and is to be used for signalling with other network connection devices. This port number is universal in the sense that all exchanges are to use

this particular port number when sending data packets containing signalling information. Port numbers are here the equivalent of TSAP identifiers that are described in the telecommunications standard ITU-T H.323, which document is herein incorporated as
5 reference. The signalling channel store 18 also includes a name associated with each other exchange or with each other computer network address of such an exchange to which it can be connected. The network connection device 44 of the first exchange PBX1 also stores a computer network address of the DNS
10 server 16 as well as an own computer network address that other exchanges are to use when communicating with the first exchange PBX1, which addresses are also stored in the signalling channel store 18. Each other exchange that the first exchange PBX1 can be connected to through the computer network 14 must therefore
15 comprise at least one network connection device having an own computer network address as well as a computer network address in the form of an IP (Internet Protocol) address for the DNS server 16.

What happens when starting up the system is that, with reference
20 to fig. 1, 2 and 3, the switch control means 42 in the first exchange PBX1 sends an order to the local control means 20 to set up signalling channels. The local control means then sets the signal processing means 24 to receive information from the local control means 20, to apply a signal structure suitable for
25 sending data over the computer network, such as TCP (Transmission Control Protocol), and to send data packets according to established standards known to the man skilled in the art to the DNS server 16 using the computer network address of the DNS server 16, which address has been fetched from the
30 signalling channel store 18. Each such packet sent to the DNS server 16 contains the name of another exchange to which the

first exchange wants to connect itself to, procedural step 26. This name has also been fetched from the signalling channel store 18. The DNS server 16 contains a table which translates each such name to a corresponding computer network address. The
5 DNS server 16 then translates the name to a network address and returns this address to the first exchange PBX1, procedural step 28. The signal processing means 24 receives this packet, removes the data structure and sends the content, i.e. the computer network address, to the local control means 20. The local
10 control means 20 then stores this address in the signalling channel store 18 and associates it with the name and informs the switch control means 42 that a signalling channel is set up. The first exchange PBX1 has then received a computer network address to each other exchange it can be connected to, in this case only
15 the address of the second exchange PBX2. The second exchange PBX2 performs the same routine in order to receive the computer network address of the first exchange. In this way a bi-directional data packet connection is set up as a signalling channel over which signalling can later be performed, procedural
20 step 30.

Once this signalling channel has been set up, the two exchanges go on and set up a "trunk line". This is done through exchanging data packets via the bi-directional data packet connection. The switch control means 42 in the first exchange PBX1 orders the
25 local control means 20 to set up a number of traffic channels. The number it chooses are normally the same number as the number of possible channels in an ordinary trunk line, but fewer or more channels are of course possible. The local control means 20 has a number of additional port numbers in storage in the
30 traffic channel store 19 intended for use by other exchanges when sending packets to the first exchange. It selects, for each

other exchange to which traffic channels are to be set up, a separate set of port numbers from the ones in the traffic channel store 19 to be used by the other exchange for channels, procedural step 32. In the described embodiment only one other exchange is included in the system so port numbers are chosen for that exchange only. Each set of port numbers are then sent to the corresponding exchange via the respective bi-directional data packet connection, procedural step 34. In the present example only one other exchange, the second exchange PBX2, is included in the system, so the first exchange PBX1 sends the port numbers to it via the bi-directional data packet connection, i.e. in data packets having the IP address of the network connection device of the other exchange and the predetermined signalling port number. Each such other exchange receiving these sets of port numbers selects a corresponding set of port numbers from its traffic channel store and pairs each port number in this corresponding set with a port number of the received set and stores each pair in its traffic channel store. Thereafter the corresponding set is sent to the first exchange, procedural step 36, and this exchange also performs this pairing and stores each pair as a traffic channel in the traffic channel store 19, procedural step 38. Finally the local control means 20 notifies the switch control means 42 that the traffic channels are set up.

What happens when a telephone call is to be set up is thereafter first, with reference to fig. 1, 2 and 4, that a user of the first exchange PBX1 at the first extension 52, wants to call the second extension 54 of the second exchange PBX2. He therefore lifts the phone and dials the number of the second extension. This is detected by the switch control means 42 in the first exchange PBX1, procedural step 60. The switch control means then

analyses the dialled number, the so called B-number, procedural step 62. If the number was a number not associated with the second exchange PBX2, procedural step 64, the switch control means 42 sets up a speech channel in a normal fashion, procedural step 66, like for example via the PSTN. In our case the number was however a number associated with PBX2 and the switch control means 42 keeps track of all numbers associated with the other exchange. The connection was in this case wanted with PBX2, procedural step 64, and the switch control means therefore communicates with the local control means 20 in the network connection device 44 in the first exchange PBX1 in order to connect a telephone call.

Signalling information is sent from the switch control means 42 to the local control means 20 in the first exchange 10. This signalling information is for example sent according to the protocol ECMA/ISO QSIG or some other suitable protocol and a traffic channel is selected through this signalling. The local control means 20 sets the signal processing means 24 to apply a signal structure suitable for data communication, for example TCP, and supplies the signal processing means 24 with the previously mentioned IP-address and predetermined signalling port number to be used for communication with the network connection device in the second exchange PBX2. The signal shaping means packs this signalling information in packets having above mentioned IP-address and port number and sends it to a respective signal processing means in the second exchange PBX2. During the signalling the network connection device in the first exchange also receives packets from the second exchange, which packets have the own IP-address and the same predetermined port number dedicated to signalling. When the signal processing means 24 receives signalling packets from the second exchange

PBX2 it unpacks them, removes the signal structure and sends the content to the local control means 20. The local control means forwards all received signalling information to the switch control means, so that the switch control means can perform the ordinary signalling functions. During this signalling a port number pair or a channel is selected to be used for conveying the telephone call. In this way signalling has been performed over the signalling channel, procedural step 68.

The local control means in the first exchange PBX1 then selects a signal shaping means to be used and sets the signal shaping means to be associated with the previously selected port number pair and to work in a special mode for this channel. Alternatively the signal shaping means is chosen in the switch control means and the local control means is informed of this fact and associates the signal processing means with this signal shaping means. Yet another alternative is that a signal shaping means is associated with a port number pair at the original setting up of this channel. The same procedure is performed in the second exchange.

Thereafter, when all signalling has been performed and a connection is to be set up between the extensions, the first extension 52 is connected to the selected signal shaping means 22 via the switch core 40 and the signal shaping means starts to receive speech signals from the extension 52, procedural step 70. The received signals are compressed in the signal shaping means, procedural step 72, which compressed signals are then forwarded to the signal processing means 24. The compression can for example be performed using the LD-CELP compression algorithm according to the ITU-T standard G.728. The signal processing means 24 then applies a signal structure suitable for telephony

over the computer network, such as UDP/IP (Unreliable Datagram Protocol/Internet Protocol), and packs these compressed signals having this structure into packets having the IP address of the network connection device of the second exchange and the selected port number of the pair, procedural step 74. These packets are thereafter sent to the second exchange PBX2 via the computer network, procedural step 76.

The method the second exchange PBX2 is working according to will in the following be explained with reference to fig. 1, 2 and 5.

First of all signalling is performed in order to set up a speech connection over the computer network, procedural step 80. This signalling is basically performed in accordance with the same protocol, for example ECMA/ISO Q-SIG, and in the same way as has previously been described. The local control means 20 has set the signal processing means 24 in advance to remove the signal structure and to forward the content of these packets, in dependence of the port number, to the local control means 20. Thereafter the two switch control means of the two exchanges PBX1 and PBX2 exchange signalling information such as selection of which channel to use. The local control means then associates a signal shaping means with the port number in the pair chosen for reception of data packets in that it sets the signal processing means to forward the content of packets having this port number to a special signal shaping means. It also sets the signal processing means to, for this port number, remove a signal structure suitable for telephony, like UDP/IP. This association of signal shaping means 22 to a port number could again have been performed when setting up the channel.

When the signalling has been performed between the two switch control means, the switch control means 42 in the second

exchange PBX2 connects the extension associated with the dialled B-number, i.e. the second extension 54, to the signal shaping means 22 associated with the selected port number, procedural step 82. The signal processing means 24 then starts to receive
5 packets having the selected port number from the first exchange PBX1, procedural step 84. The signal processing means then unpacks these packets and removes the signal structure, which signal structure is the structure suitable for telephony over computer networks such as UDP/IP, procedural step 86. The
10 content of the packets are then forwarded to the selected signal shaping means 22 in dependence of the port number. This content is then decompressed in the signal shaping means 22 in order to obtain telephone signals having a structure suitable for switching in the switch core, procedural step 88. The structure
15 suitable for switching is normally in the form of eight bits and decompression is performed by changing the bit rate of the signals according to a suitable decompression algorithm like LD-CELP according to the ITU-T standard G.728. The decompressed speech signals are then connected through the switch core to the
20 second extension 54 and thus a speech connection is set up, procedural step 90.

The description has so far only been described in one direction, with a speech connection for the first exchange PBX1 to the second exchange PBX2. During the above described signalling a
25 second speech connection is of course set up in the opposite direction from the second exchange to the first exchange in order to obtain a duplex connection. This second connection is however set up in the same way as the first speech connection and will therefore not be further described here.

When the conversation is finished, the call is terminated in conventional fashion and then the used port numbers are indicated as being free to be used again for other telephone calls. Special information typical for a corporate network, such as the name of the person calling and other so called D-channel information that can be transferred together with a call, can be transferred in the signalling channel. As an alternative a separate D-channel can be set up using a special D-channel port number for each voice connection.

10 The above described method have used a selection of port numbers and setting up of channels between two exchanges trunk wise, which makes it easier to integrate the setting up of computer network channels into the normal workings of the telephone exchange, but one can also operate on a channel by channel

15 basis. In that case the signalling channel can be set up either at start up as previously described or when a call is to be made. If the signalling channel is to be set up when a call is to be made, the switch control means can have the ability to, when analysing the B number, associate this B-number with a

20 name. The name is then sent on to the DNS server for obtaining an IP address. The own IP address is then sent to the other exchange using this IP address received from the DNS server so that a signalling channel is set up. Negotiation of port numbers to be used for telephony is then performed over this signalling

25 channel for one traffic channel at a time. Port number pairs are thus not formed until they are needed and they are released from each other when not used. The advantage of this way of working is that fewer port numbers are used and that a more flexible way of setting up channels between exchanges is achieved. A

30 disadvantage is however that more complicated programs have to

be implemented and a more complex network connection device is needed than in the previous embodiment.

Each exchange can comprise more than one network connection device, which each can have separate network address.

- 5 If several network connection devices are used in the same exchange for communication with another exchange it is sufficient if one performs all the signalling and the others only have traffic channels set up between them. The network connection device in charge of signalling should normally not be
10 excluded from also setting up traffic channels.

It is not necessary for both exchanges to include network connection devices. One of the exchanges could as an alternative have been connected to the computer network via a gateway. The signalling channel set up could also have been used as a traffic
15 channel once the signalling have been finished in which case no traffic channel would be set up. This latter approach is of course only relevant when calls over the computer network are in progress one at a time.

A traffic channel or the signalling channel when used as a
20 traffic channel are nor channels in the ordinary sense, since UDP is a connection-less type of connection. These channels do thus not have any connection to channels in time slots.

During all these previously described activities the switch control means 42 in at least one of the exchanges is monitoring
25 the functioning of the network connection device included in this exchange by the use of the monitoring means 46. The monitoring means 46 controls the network addresses and port numbers used. These addresses and port numbers are updated when

for examples changes of a corporate network is done. More exchanges can for example be added or subtracted to the network, more connections might need to be set up between two exchanges and so on. The monitoring means 46 can also be set to check the
5 IP addresses of other exchanges as represented in the DNS server. These addresses can be changed when the network is changed like for example when it is expanded. The changes are registered in the DNS server in the process of network administration. It is very convenient to incorporate these
10 monitoring possibilities into the normal monitoring functions of the switch control means. This adding and subtracting of addresses can be integrated with commands for initiating trunk lines, so that the computer network trunk lines can be initiated in about the same way as ordinary trunk lines. Other monitoring
15 functions incorporated into the monitoring means 46 are logging of problems on the computer network that disrupts the telecommunication traffic such as not receiving packets and generation of alarms if these problems reach a certain level. Examples of this are if a number of packets not received during
20 a period of time are equal to a certain amount of packets, the number of distorted packets are higher than a certain level etc. Other functions are keeping of statistics of the quality like lost packets, failed connections etc. The software in the local control means can be updated at the same time as when other
25 software in the exchange is updated. Backup copies of the computer network trunks are also made together with security copies for normal telephone trunks etc.

By monitoring channels an exchange can, in dependence of alarms, reroute and/or deny connections through the computer network.

With the invention one obtains a telephone system that makes it possible to use a computer network for setting up telephone calls between exchanges without the use of gateways and internet service providers (ISPs) to set up the connections. One
5 furthermore gains the additional advantage of using the monitoring functions present in the exchange in monitoring traffic over the channels. The invention is specially useful when used in interconnecting private branch exchanges via an already existing corporate computer network in order to set up
10 telephone calls. This saves a lot of money otherwise used for leased lines or paid to ISPs or telecommunication operators. One further advantage is that, if the corporate computer network is connected to the internet, an exchange placed at a very long distance from the corporate network can connect itself to this
15 corporate network via the internet and thereby get a telephone connection to an exchange connected to the corporate network. This might be advantageous if for example the corporate network is located in Europe and the exchange is located in the USA.

The present invention has been described in relation to voice
20 compression. This is a preferred feature of the invention but it can optionally be left out of the exchanges. The load on the computer network gets heavier, which can lead to inferior quality. It can however be an alternative when a small local area network is used.

25 The invention is of course not limited to the embodiments described above and shown in the drawings but can be modified within the scope of the enclosed claims.

CLAIMS

1. Telephone exchange for setting up telephone connections to at least one other exchange via a computer network and comprising a switch core, a switch control means responsible for
5 setting up connections between users of the exchange and at least one network connection device connected between the switch core and a gate of the exchange for communication with at least one other exchange via a gateway or via at least one other network connection device;
- 10 characterised in that at least one of the network connection devices in the exchange is arranged to set up, together with the gateway or the other network connection device, a bi-directional data packet connection as a signalling channel between the switch control means of the
15 exchange and a switch control means of the other exchange via the computer network;
- to send signalling information over this signalling channel;
- to apply a signal structure suitable for telephony over the computer network to speech signals received from the switch core
20 in order to produce data packets containing telephony; and
- to send the data packets containing telephony to the other network connection device over the signalling channel or over a traffic channel that has been set up between the exchanges via the computer network using signalling over the signalling
25 channel;
- wherein the switch control means comprises monitoring means arranged to survey and service the network connection device.
2. Telephone exchange according to claim 1, wherein the monitoring means is arranged to be able to change network
30 addresses and port numbers used in communication.

3. Telephone exchange according to claim 1, wherein the monitoring means in being arranged to survey and service the network connection device, is arranged to monitor faults occurring when sending data packets to and from the network
5 connection device and generate alarms if such faults occur.

4. Telephone exchange according to claim 1, wherein the survey and service of the network connection device comprises trunk monitoring functions.

5. Telephone exchange according to claim 1, wherein the exchange
10 is a private branch exchange.

6. Telephone exchange according to claim 1, wherein the network connection device comprises a traffic channel store and is arranged to receive, from the gateway or said other network connection device via the signalling channel, information about
15 at least one port number, which port number is allocated for use in setting up one traffic channel and is further arranged to store the port number in the traffic channel store.

7. Telephone exchange according to claim 6, wherein the network connection device is arranged to set up several traffic channels
20 simultaneously before starting to send any data packets containing telephony.

8. Telephone exchange according to claim 6, wherein the network connection device is arranged to set up traffic channels one at a time in dependence of demand.

25 9. Telephone exchange according to claim 6, wherein the network connection device is further arranged to compress digital speech signals received from the switch core before applying said signal structure.

10. Telephone exchange according to claim 9, wherein the network connection device comprises

at least one signal shaping means connected to the switch core and being arranged to receive signals from the switch core
5 having a format suitable for switching in said switch core and to perform said compression on these signals, which signals are originating from a user of the exchange;

one signal processing means connected between each signal shaping means and the gate and being arranged to receive said
10 compressed signals from the signal shaping means and to apply a signal structure suitable for sending the telephone signals on the computer network and to pack these processed signals into data packets for sending on the computer network, where the structure comprises a port number; and

15 a local control means connected to the switch control means, the signal shaping means and the signal processing means and being arranged to, for each signal shaping means and in dependence of control information received from the switch control means, supply the signal processing means with the address of the
20 gateway or the network connection device to which data packets are to be sent and with a port number allocated for that traffic channel,

so that the content in said data packets can be sent to the user of the other exchange in dependence of said port number.

25 11. Telephone exchange according to claim 10, wherein the local control means is arranged to supply signalling information together with network address and port number to the signal processing means and to set the signal processing means to apply a signal structure to said signalling information, which
30 structure is suitable for sending data, so that data packets

containing signalling information can be sent on the computer network to the other exchange.

12. Telephone exchange for receiving telephone calls from at least one other exchange via a computer network and comprising a switch core, a switch control means responsible for setting up connections between users of the exchange and at least one network connection device connected between the switch core and a gate of the exchange for communication with at least one other exchange via a gateway or via at least one other network connection device;

characterised in that at least one of the network connection devices in the exchange is arranged to set up, together with the gateway or the other network connection device, a bi-directional data packet connection as a signalling channel between the switch control means of the exchange and a switch control means of the other exchange via the computer network;

to send signalling information over this signalling channel;

to receive, over the signalling channel or over a traffic channel set up between the exchanges via the computer network using signalling over the signalling channel, data packets containing telephony from the other network connection device;

to remove a signal structure suitable for telephony from the content of said data packets for obtaining speech signals; and

to send the speech signals to the switch core for transmittal to a user connected to the exchange;

wherein the switch control means comprises monitoring means arranged to survey and service the network connection device.

13. Telephone exchange according to claim 12, wherein the network connection device comprises a traffic channel store

comprising at least one port number and is arranged to send, to the gateway or said other network connection device on said signalling channel, information about said port number, which port number is allocated for use in setting up one traffic
5 channel.

14. Telephone exchange according to claim 13, wherein the network connection device is further arranged to decompress the content of said data packets after the removal of the signal structure for obtaining the speech signals to be sent to the
10 switch core.

15. Telephone exchange according to claim 14, wherein the network connection device comprises
at least one signal processing means connected to the computer network via the gate and being arranged to receive and unpack
15 data packets received from the computer network and remove signal structure suitable for telephony from signals sent in these packets, where the signal structure comprises a port number;

at least one signal shaping means connected between the switch
20 core and the signal processing means and being arranged to receive unpacked signals from the signal processing means, decompress the received signals and send them to the switch core in a format suitable for switching; and

a local control means connected to the switch control means, the
25 signal shaping means and the signal processing means and being arranged to connect the signal processing means to a signal shaping means in dependence of the port number contained in the signal structure of the packet in order to let a user connected to the exchange receive a call from another user via the
30 computer network.

16. Telecommunication system for setting up telephone connections between at least two exchanges via a computer network and comprising at least a first and a second telephone exchange connected to each other via a computer network, wherein

5 each telephone exchange comprises

a switch core, a switch control means responsible for setting up connections between users of the exchange and at least the first of the exchanges comprises at least one first network connection device connected between the switch core and a gate, which gate

10 is connected to the computer network, and the second exchange is either connected to a gateway or comprises at least one second network connection device;

c h a r a c t e r i s e d by the first network connection device and the gateway or the second network connection device being

15 arranged

to set up a bi-directional data packet connection as a signalling channel between the switch control means of the exchanges via the computer network;

to send signalling information over this signalling channel;

20 by the network connection device in the first exchange being arranged

to apply a signal structure suitable for telephony over the computer network to speech signals received from the switch core in order to produce data packets containing telephony; and

25 to send the data packets containing telephony to the gateway or the second network connection device over the signalling channel or over a traffic channel that has been set up between the exchanges via the computer network using signalling over the signalling channel;

30 and by the gateway or the second network connection device being arranged

25. Method according to claim 17, comprising the further steps of receiving, in the second exchange, the data packets from the traffic channel;

unpacking the packets;

- 5 removing the signal structure for obtaining speech signals; and sending the speech signals to a user connected to the second exchange.

26. Method according to claim 24, comprising the further steps of receiving, in the second exchange, the data packets from said
10 traffic channel;

unpacking the packets;

removing the signal structure for obtaining speech signals decompressing the speech signals; and

- 15 sending the decompressed speech signals to a user connected to the second exchange.

27. Method of receiving telephone signals from a first exchange in a second exchange using a computer network comprising the steps of:

- 20 setting up a bi-directional data packet connection as a signalling channel between the exchanges via the computer network;

performing signalling between the exchanges over the signalling channel;

- 25 receiving, in the second exchange, data packets sent from the first exchange over the signalling channel or over a traffic channel set up between the two exchanges via the computer network in dependence of signalling performed over the signalling channel;

removing a signal structure suitable for telephony over the computer network from the received packets in order to obtain speech signals;

5 sending the speech signals to a user connected to the second exchange; and

surveying and servicing, in at least one of the exchanges, channels between the exchanges.

1/5


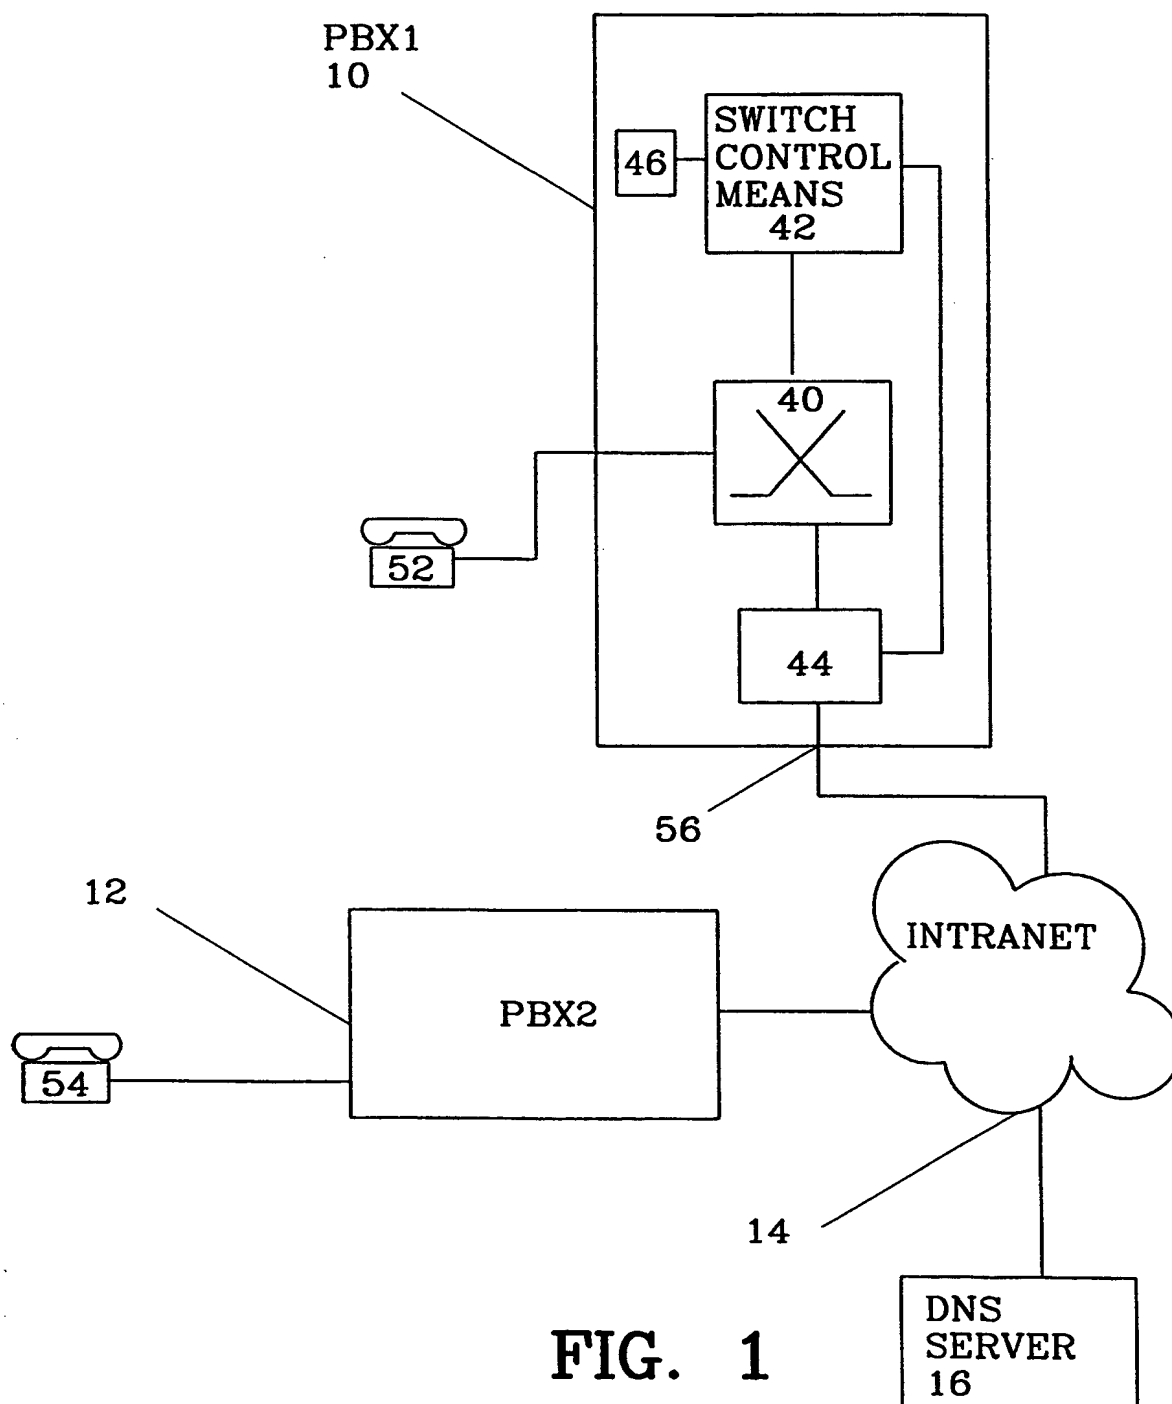


FIG. 1

2/5

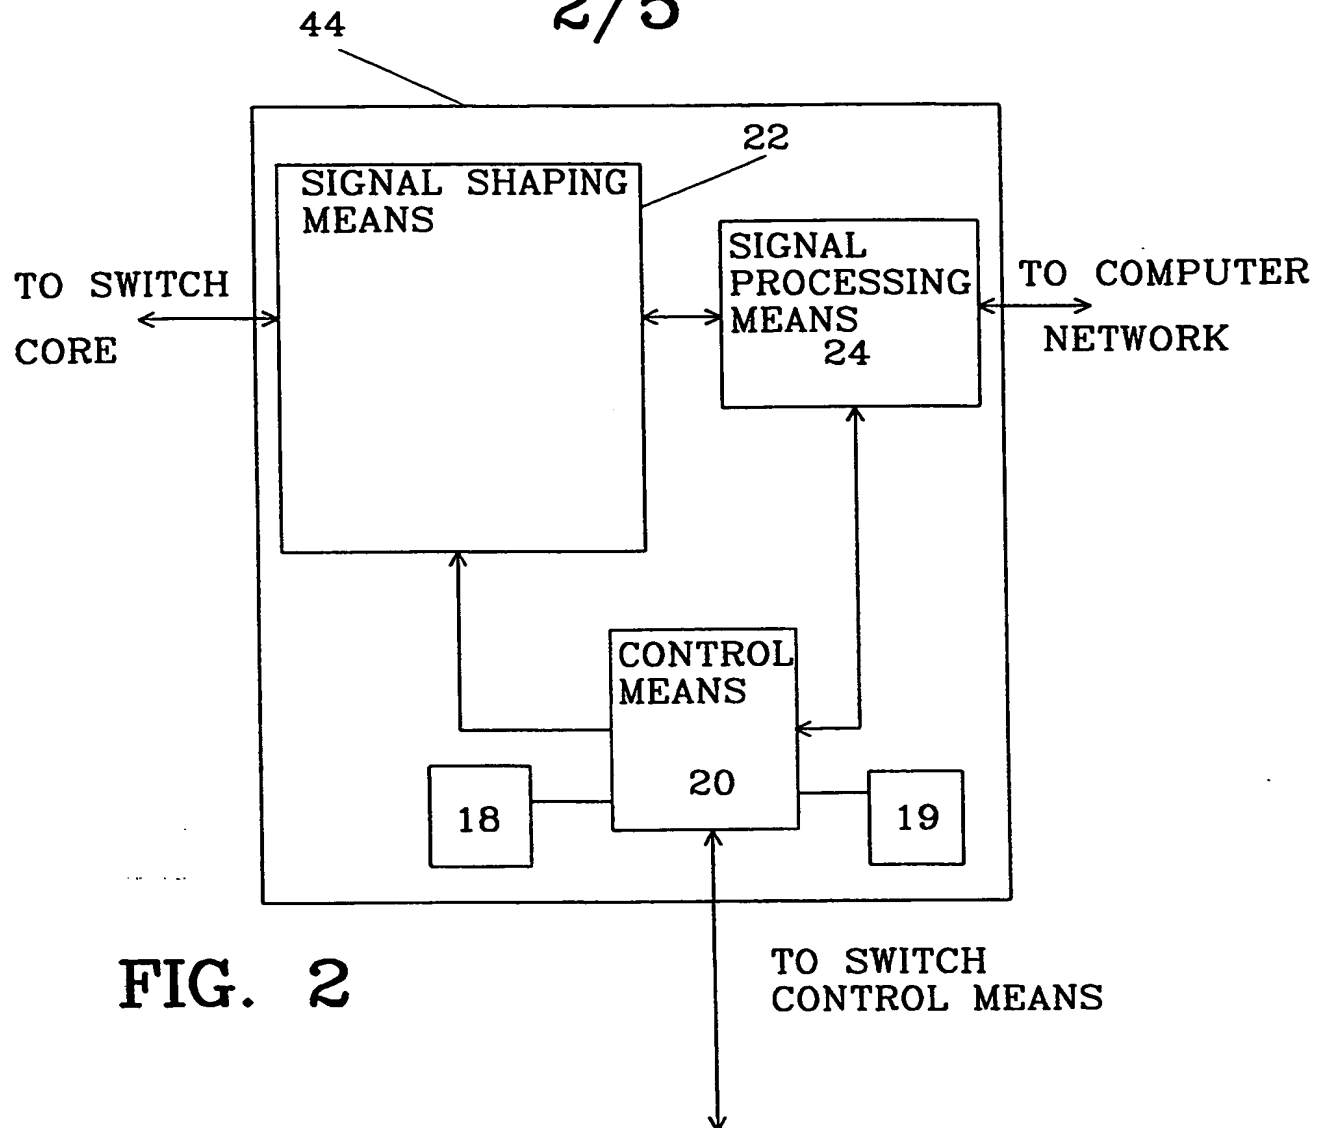

3/5

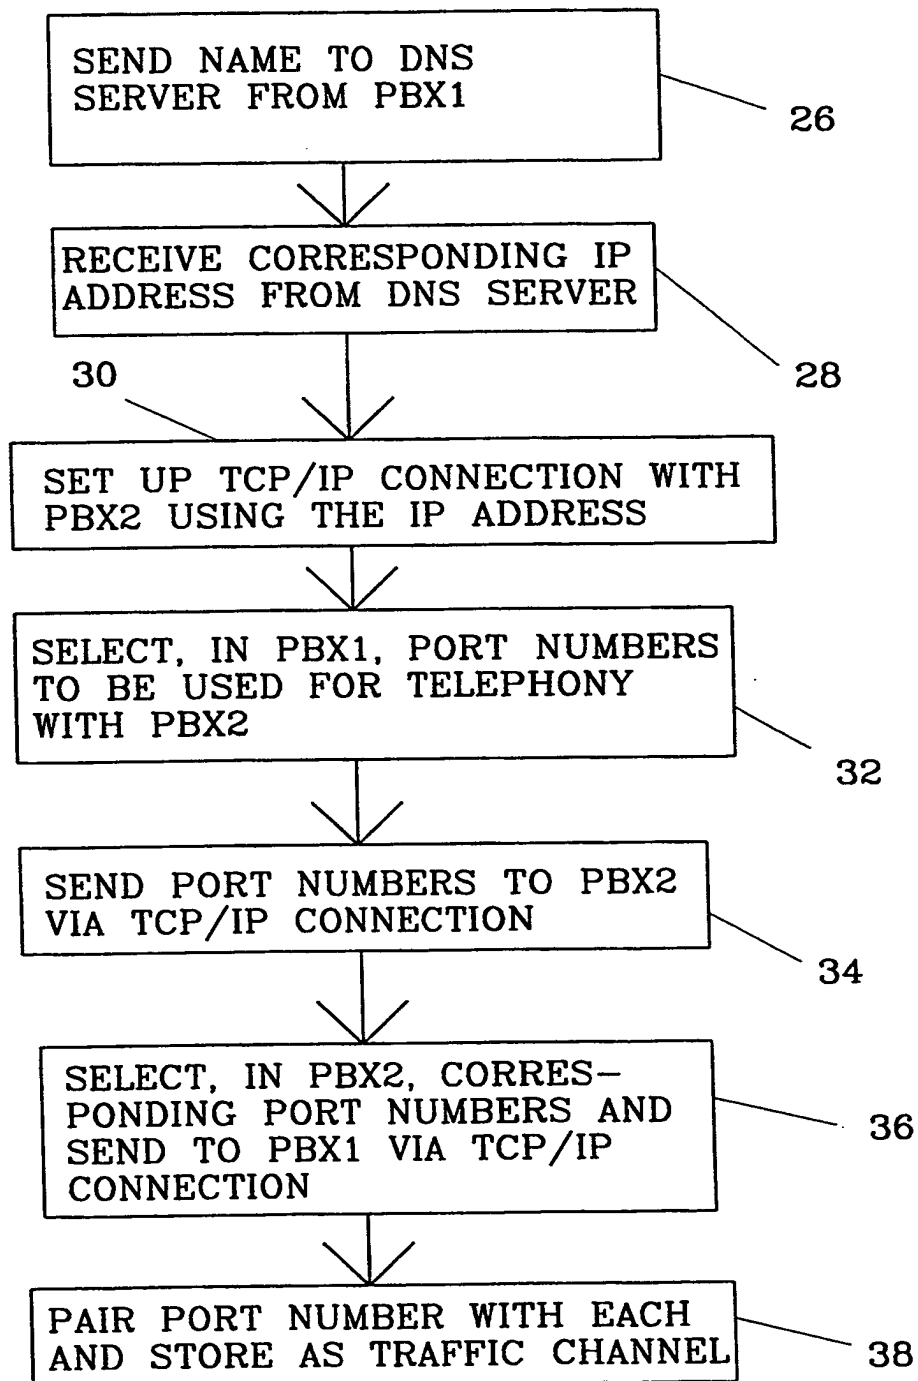


FIG. 3

4/5

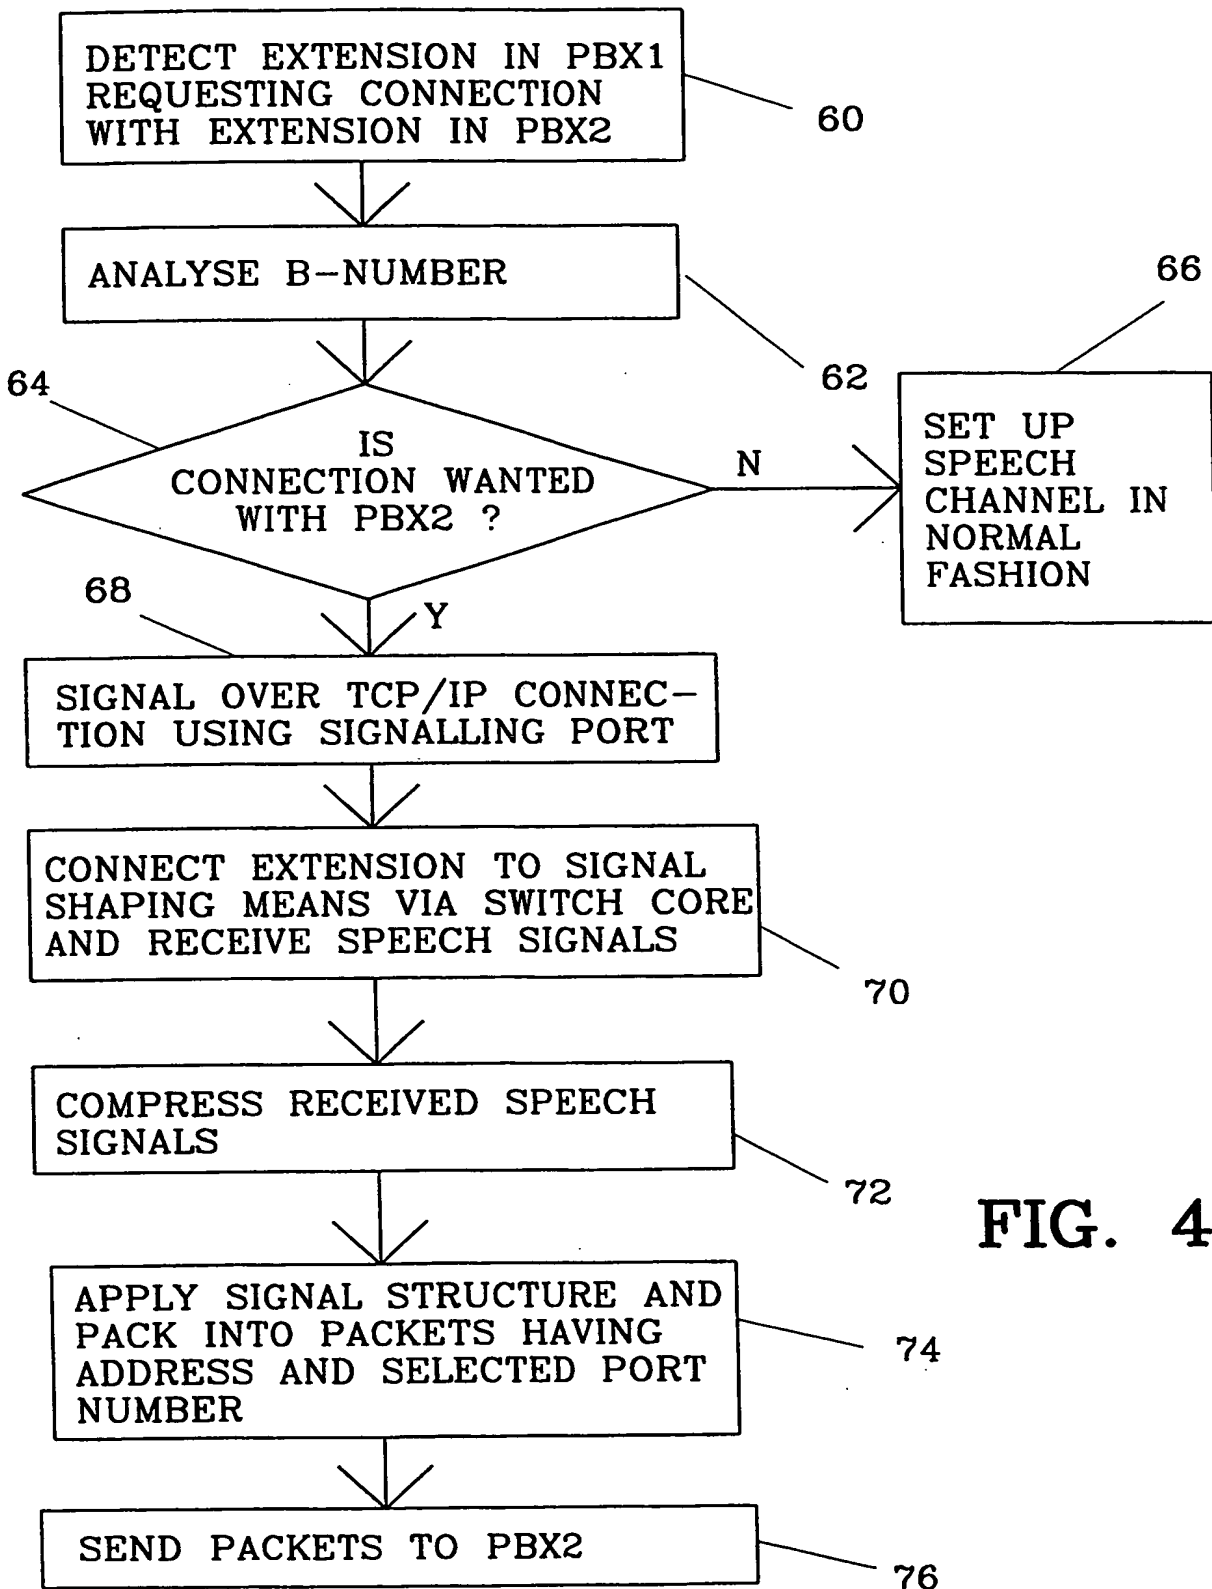


FIG. 4

5/5

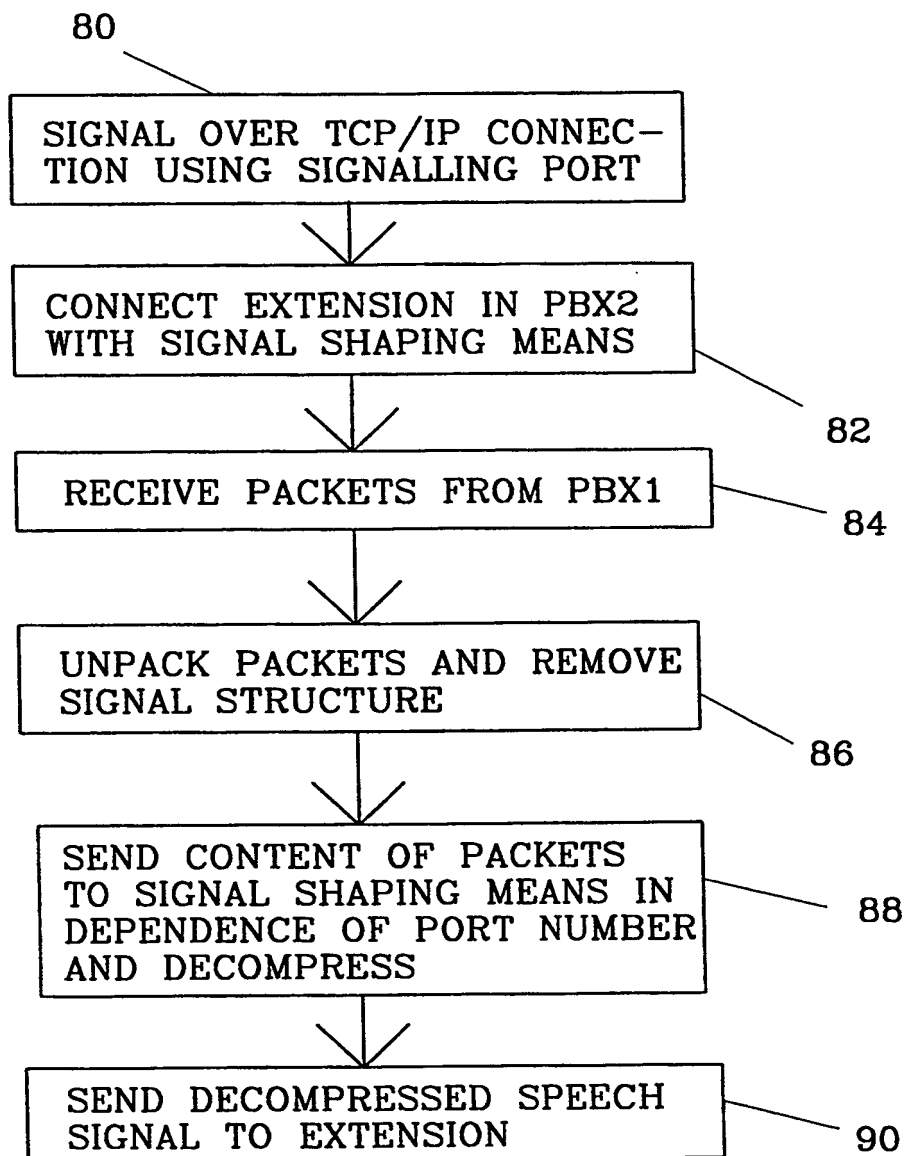


FIG. 5

INTERNATIONAL SEARCH REPORT

national Application No
PCT/SE 98/00509

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H04M3/22 H04L12/64 H04L12/66 H04M7/00 H04M3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04M H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 93 15583 A (PLESSEY TELECOMM) 5 August 1993 see the whole document ---	1, 12, 16, 17, 27
A	US 4 866 704 A (BERGMAN LARRY A) 12 September 1989 see abstract see figures 8, 23, 25 see column 4, line 44 - column 5, line 13 see column 7, line 30 - line 63 see column 13, line 35 - column 14, line 42 ---	1, 12, 16, 17, 27
A	WO 96 20553 A (ALPHANET TELECOM INC) 4 July 1996 cited in the application see abstract see figure 5 ---	1, 12, 16, 17, 27
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

13 July 1998

Date of mailing of the international search report

21/07/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Megalou, M

INTERNATIONAL SEARCH REPORT

International Application No
PCT/SE 98/00509

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 903 261 A (BARAN PAUL ET AL) 20 February 1990 see abstract see figure 1 see column 4, line 57 - column 5, line 5 ---	1,12,16, 17,27
A	US 5 115 431 A (WILLIAMS CHARLES S T ET AL) 19 May 1992 see abstract see figure 1 see column 5, line 10 - line 23 ---	1,12,16, 17,27
P,A	WO 97 16916 A (TELECOM INTERNET LTD ;TUROCK DAVID L (US)) 9 May 1997 see abstract see page 10, line 9 - line 20 see page 14, line 32 - page 17, line 30 see figures 3,5 ---	1,3,4, 12,16, 17,19,27
P,A	WO 97 47114 A (KRUY STEVEN J ;LAND MARK S (US); SIGNAL GLOBAL COMMUNICATIONS L (U) 11 December 1997 see abstract see page 35, line 1 - line 14 see figures 1,3 -----	1,12,16, 17,27

BEST AVAILABLE COPY

INTERNATIONAL SEARCH REPORT

Information on patent family members

I. International Application No

PCT/SE 98/00509

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9315583 A	05-08-1993	EP 0577804 A	12-01-1994
US 4866704 A	12-09-1989	NONE	
WO 9620553 A	04-07-1996	CA 2139081 A	24-06-1996
		AU 4294996 A	19-07-1996
		EP 0799543 A	08-10-1997
		US 5608786 A	04-03-1997
US 4903261 A	20-02-1990	US 4771425 A	13-09-1988
		DE 3586031 A	17-06-1992
		EP 0179979 A	07-05-1986
		JP 5276243 A	22-10-1993
		JP 2527931 B	28-08-1996
		JP 61107856 A	26-05-1986
		US 4819228 A	04-04-1989
US 5115431 A	19-05-1992	NONE	
WO 9716916 A	09-05-1997	AU 7682196 A	22-05-1997
WO 9747114 A	11-12-1997	US 5751706 A	12-05-1998
		AU 3475697 A	05-01-1998

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)